

VersaMax Introduction

VersaMax I/O and Control

With its innovative modular architecture, VersaMax combines power and versatility to help provide performance in a compact and affordable control solution.

The VersaMax product family can be used as I/O, as a PLC, and as distributed control for up to 4096 I/O points. With its modular architecture, intuitive features, and unparalleled ease of use, it helps save machine builders and end users time and money.


VersaMax is the first GE Intelligent Platforms control product created using the unique Six Sigma design process. Six Sigma combines global research and development techniques, extensive customer needs analysis, and rigorous quality control standards.

The VersaMax I/O and Control product family features a broad selection of I/O modules, terminations, power supplies, and network interface options to enhance your control capability.

Proficy Machine Edition

Proficy Machine Edition is an advanced software environment for the development and maintenance of machine level automation. Visualization, motion control, and execution logic are developed with a single programmer.

Power Supplies pages 180-181

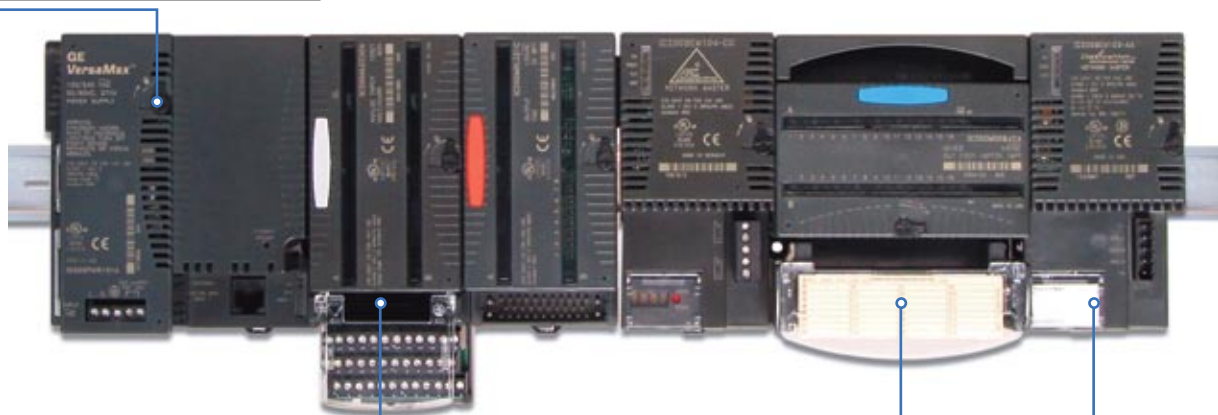

Analog I/O Modules pages 195-199

Discrete I/O Modules pages 182-194

Network Interface Modules page 205

CPUs page 174

Carriers pages 175-177

I/O Interposing Bases pages 178-179

Expansion Modules page 202

RTD and Thermocouple Modules page 200

Specialty Modules page 201

Remote I/O Units pages 203-204

Serial Communications page 206

Accessories page 207

Configuration Guidelines pages 208-209

Publication Reference Chart

| | |
|----------|--|
| GFK-1179 | Installation Requirements for Conformance to Standards |
| GFK-1503 | VersaMax PLC User's Manual |
| GFK-1504 | VersaMax Modules, Power Supplies, and Carriers User's Manual |
| GFK-1533 | VersaMax System DeviceNet Communications Modules User's Manual |
| GFK-1534 | VersaMax System Profibus Network Modules User's Manual |
| GFK-1535 | VersaMax System Genius Network Interface Unit User's Manual |
| GFK-1563 | VersaMax I/O and Industrial Networking Application Guide |

| | |
|-------------|---|
| GFK-1697 | VersaMax System AS-i Network Master Module User's Manual |
| GFK-1847 | Remote I/O Manager User's Manual |
| GFK-1852 | VersaMax Serial to Ethernet Adapter User's Manual |
| GFK-1860 | VersaMax System Ethernet Network Interface Unit User's Manual |
| GFK-1868 | Proficy Machine Edition Getting Started Guide |
| GFK-1876 | VersaMax Ethernet Station Manager Manual |
| IC690CDU002 | InfoLink for PLC CD-ROM |

CPU's



VersaMax CPUs supply a number of features usually found only in PLCs with larger footprints, including up to 128K of memory for application programs, floating point math, and real-time clock. With a modular and scalable architecture, the VersaMax CPU is ideal for standalone control applications with up to 256 local I/O or expanded systems of up to 4,096 I/O points.

| | IC200CPU001 | IC200CPU002 | IC200CPU005 | IC200CPUE05 |
|--|---|---|---|--|
| Product Name | VersaMax PLC CPU 32K Configurable Memory, 2 Ports RS-232 and RS-485 | VersaMax PLC CPU 42K Configurable Memory, 2 Ports RS-232 and RS-485 | VersaMax PLC CPU 128K Configurable User Memory, 2 Ports RS-232 and RS-485 | VersaMax PLC CPU 128K Configurable User Memory, 2 Ports RS-232 and RS-485, 10 MBIT Ethernet Port, Supports EGD and SRTP. |
| I/O Discrete Points | 2048 in, 2048 out | 2048 in, 2048 out | 2048 in, 2048 out | 2048 in, 2048 out |
| I/O Analog Words | Configurable | Configurable | Configurable | Configurable |
| Registers | Configurable | Configurable | Configurable | Configurable |
| Discrete Internal Bits | 1024 points | 1024 points | 1024 points | 1024 points |
| Discrete Temporary Bits | 256 points | 256 points | 256 points | 256 points |
| Global Discrete Bits | 1280 points | 1280 points | 1280 points | 1280 points |
| Program Memory | Configurable | Configurable | Configurable | Configurable |
| Boolean Execution Speed | 1.8 ms/K (typical) | 1.8 ms/K (typical) | 0.8 ms/K (typical) | 0.8 ms/K (typical) |
| Floating Points | Yes | Yes | Yes | Yes |
| Override | Yes | Yes | Yes | Yes |
| Built-in Communications | SNP Slave, RTU Master and Slave, Serial I/O | SNP Slave, RTU Master and Slave, Serial I/O | SNP Slave, RTU Master and Slave, Serial I/O | 10 MBIT Ethernet Port, Slave, RTU Master and Slave, Serial I/O |
| Type of Memory Storage | System flash, battery- backed RAM | System flash, battery- backed RAM | System flash, battery- backed RAM | System flash, battery- backed RAM |
| Battery-Backed Real-time Clock | Yes | Yes | Yes | Yes |
| 5V Backplane Current Consumption (mA) | 40 with no EZ Store attached; 140 when EZ Store attached | 40 with no EZ Store attached; 140 when EZ Store attached | 80 with no EZ Store attached; 180 when EZ Store attached | 160 with no EZ Store attached; 260 when EZ Store attached |
| 3.3V Backplane Current Consumption (mA) | 100 | 100 | 290 (Requires a power supply with 3.3 VDC expanded) | 650 (Requires a power supply with 3.3 VDC expanded) |
| Dimensions (W x H) | 2.63" (66.8 mm) x 5.04" (128 mm) | 2.63" (66.8 mm) x 5.04" (128 mm) | 4.20" (106.7 mm) x 5.04" (128 mm) | 4.95" (126 mm) x 5.04" (128 mm) |



Carriers

VersaMax provides several types of snap-together I/O carriers and interposing terminals to provide maximum wiring flexibility, as well as module hot insertion and removal. VersaMax carriers support IEC box-style, spring-style, and barrier-style terminals and are also available as snap-on auxiliary terminal strips and interposing terminals that can be mounted separately and connected to a connector-style carrier by an I/O cable.

| | IC200CHS022 | IC200CHS025 |
|--------------------------------------|---|---|
| Product Name | VersaMax Compact I/O Carrier, Local Box Clamp Connection Style | VersaMax Compact I/O Carrier, Local Spring Clamp Connection Style |
| Field Termination Type | Integrated | Integrated |
| Wiring Termination Style | Local Box | Local Spring |
| Orientation on Module on Base | Vertical | Vertical |
| Dimensions (W x H x D) | 66.8 mm (2.63 in) x 163.5 mm (6.45 in) x 70 mm (2.75 in), not including the height of DIN Rail | 66.8 mm (2.63 in) x 163.5 mm (6.45 in) x 70 mm (2.75 in), not including the height of DIN Rail |
| Cables | N/A | N/A |



Carriers

VersaMax provides several types of snap-together I/O carriers and interposing terminals to provide maximum wiring flexibility, as well as module hot insertion and removal. VersaMax carriers support IEC box-style, spring-style, and barrier-style terminals and are also available as snap-on auxiliary terminal strips and interposing terminals that can be mounted separately and connected to a connector-style carrier by an I/O cable.

| | IC200CHS001 | IC200CHS002 | IC200CHS005 |
|--------------------------------------|--|--|--|
| Product Name | VersaMax I/O Carrier, Local Barrier Style | VersaMax I/O Carrier, Local Box Style | VersaMax I/O Carrier, Local Spring Clamp Connection Style |
| Field Termination Type | Integrated | Integrated | Integrated |
| Wiring Termination Style | Barrier | Box | Spring |
| Orientation on Module on Base | Horizontal | Horizontal | Horizontal |
| Dimensions (W x H x D) | 110.5 mm (4.35 in) x 139.7 mm (5.5 in) x 70 mm (2.75 in), not including the height of DIN Rail | 110.5 mm (4.35 in) x 139.7 mm (5.5 in) x 70 mm (2.75 in), not including the height of DIN Rail | 110.5 mm (4.35 in) x 139.7 mm (5.5 in) x 70 mm (2.75 in), not including the height of DIN Rail |
| Cables | N/A | N/A | N/A |



Carriers

VersaMax provides several types of snap-together I/O carriers and interposing terminals to provide maximum wiring flexibility, as well as module hot insertion and removal. VersaMax carriers support IEC box-style, spring-style, and barrier-style terminals and are also available as snap-on auxiliary terminal strips and interposing terminals that can be mounted separately and connected to a connector-style carrier by an I/O cable.

| | IC200CHS003 | IC200CHS011 | IC200CHS012 | IC200CHS014 | IC200CHS015 |
|--------------------------------------|---|---|---|---|--|
| Product Name | VersaMax I/O Carrier, Connector Style. A connecting cable (IC200CBL1xxx) and interposing base (IC200CHS011, CHS012, CHS014, CHS015, IC200CHS1xx or IC200CHS2xx) are required. This carrier can be used with all VersaMax I/O modules EXCEPT the following, due to their high isolation requirements: IC200MDL144 Input 240 VAC 4 Point Isolated Module; IC200MDL244 Input 240 VAC 8 Point Isolated Module; IC200MDD850 Mixed 240 VAC Isolated 4 Point / Output Relay 2.0A Isolated 8 Point Module | VersaMax I/O Carrier, Interposing Barrier Style (Requires IC200CHS003 base and connecting cable IC200CBL1xxx) | VersaMax I/O Carrier, Interposing Box Style (Requires IC200CHS003 base and connecting cable IC200CBL1xxx) | VersaMax I/O Carrier, Interposing Box Thermocouple Compensation (Requires IC200CHS003 base and connecting cable IC200CBL1xxx) | VersaMax I/O Carrier, Interposing Spring Clamp (Requires IC200CHS003 base and connecting cable IC200CBL1xxx) |
| Field Termination Type | Integrated | Non-Integrated | Non-Integrated | Integrated | Non-Integrated |
| Wiring Termination Style | Connector | Barrier | Box | Box-Thermocouple Compensation | Spring |
| Orientation on Module on Base | Vertical | N/A | N/A | N/A | N/A |
| Dimensions (W x H x D) | 66.8 mm (2.63 in) x 133.4 mm (5.25 in) x 70 mm (2.75 in), not including the height of DIN Rail | 110.5 mm (4.35 in) x 105.4 mm (2.63 in) x 70 mm (2.75 in), not including the height of DIN Rail | 110.5 mm (4.35 in) x 105.4 mm (2.63 in) x 70 mm (2.75 in), not including the height of DIN Rail | 110.5 mm (4.35 in) x 105.4 mm (2.63 in) x 70 mm (2.75 in), not including the height of DIN Rail | 110.5 mm (4.35 in) x 105.4 mm (2.63 in) x 70 mm (2.75 in), not including the height of DIN Rail |
| Cables | Requires a IC200CBL1xxx cable | Requires a IC200CBL1xxx cable | Requires a IC200CBL1xxx cable | Requires a IC200CBL1xxx cable | Requires a IC200CBL1xxx cable |



I/O Interposing Bases

VersaMax I/O interposing disconnect bases enable the IC200CHS003 to connect to a wide range of termination bases. The Relay bases provide additional protection and higher amperage outputs. The Disconnect bases enables the user to easily disconnect signals, on a per point bases, from the I/O module.

| | IC200CHS003 | IC200CHS101 | IC200CHS102 | IC200CHS111 |
|---------------------------------------|---|---|---|--|
| Product Name | VersaMax I/O Carrier, Connector Style. A connecting cable (IC200CBL1xxx) and interposing base (IC200CHS011, CHS012, CHS014, CHS015, IC200CHS1xx or IC200CHS2xx) are required. This carrier can be used with all VersaMax I/O modules EXCEPT the following, due to their high isolation requirements: IC200MDL144 Input 240 VAC 4 Point Isolated Module; IC200MDL244 Input 240 VAC 8 Point Isolated Module; IC200MDD850 Mixed 240 VAC Isolated 4 Point / Output Relay 2.0A Isolated 8 Point Module | Input or Output Interposing Disconnect Style 16 Points. The base has an individual knife-switch disconnect for each signal and common terminal and its corresponding pin on the VersaMax cable connector. Requires IC200CHS003 and a connecting cable IC200CBL1xxx. | Expansion Input or Output Interposing Disconnect Style 16 Points. The base has an individual knife-switch disconnect for each signal and common terminal and its corresponding pin on the VersaMax cable connector. Requires a IC200CHS101 main base, can not be directly connected to IC200CHS003. | I/O Interposing Relay Base (replaceable relays), fused (8 amps, replaceable), 16 points. The relays on these interposing terminals are intended to be controlled with standard 24 VDC 0.5A VersaMax output modules (IC200MDL740 and IC200MDL750 using IC200CHS003 base and connected by IC200CBL1xxx). |
| Field Termination Type | Integrated | Non-Integrated | Non-Integrated | Non-Integrated |
| Wiring Termination Style | Connector | Box | Box | Box |
| Removable Terminals Connectors | N/A | No | No | No |
| Input Voltage | N/A | All discrete modules supported except MDL144, 244, 331, 730 and MDD840, 843, 850. | All discrete modules supported except MDL144, 244, 331, 730 and MDD840, 843, 850. | 24 VDC from MDL740 and MDL750 |
| Output Voltage | N/A | All discrete modules supported except MDL144, 244, 331, 730 and MDD840, 843, 850. | All discrete modules supported except MDL144, 244, 331, 730 and MDD840, 843, 850. | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Load Current per Point | N/A | N/A | N/A | 8.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC (Replaceable Fuse) |
| Protection | N/A | N/A | N/A | Replaceable Fuse |
| Points per Common | N/A | N/A | N/A | Isolated Per Point |
| Dimensions (W x H x D) | 66.8 mm (2.63 in) x 133.4 mm (5.25 in) x 70 mm (2.75 in), not including the height of the DIN Rail | 115 mm (4.5 in) x 126 mm (4.95 in) x 65 mm (2.6 in), not including the height of the DIN Rail | 115 mm (4.5 in) x 126 mm (4.95 in) x 65 mm (2.6 in), not including the height of the DIN Rail | 253.7 mm (9.9 in) x 126 mm (4.95 in) x 73 mm (2.8 in), not including the height of the DIN Rail |
| Cables | Requires a IC200CBL1xxx cable | Requires a IC200CBL1xxx cable | N/A | Requires a IC200CBL1xxx cable |



I/O Interposing Bases

VersaMax I/O interposing disconnect bases enable the IC200CHS003 to connect to a wide range of termination bases. The Relay bases provide additional protection and higher amperage outputs. The Disconnect bases enables the user to easily disconnect signals, on a per point bases, from the I/O module.

| | IC200CHS112 | IC200CHS211 | IC200CHS212 |
|---------------------------------------|--|---|---|
| Product Name | I/O Interposing Relay Base (replaceable relays), fused (8 amps, replaceable), 16 points. The relays on these interposing terminals are intended to be controlled with standard 24 VDC 0.5A VersaMax output modules (IC200MDL740 and IC200MDL750 using IC200CHS003 base and connected by IC200CBL1xxx). Expansion base. | I/O Interposing Relay Base (replaceable relays), fused (8 amps, replaceable), 16 points. Field terminals are removable. The relays on these interposing terminals are intended to be controlled with standard 24 VDC 0.5A VersaMax output modules (IC200MDL740 and IC200MDL750 using IC200CHS003 base and connected by IC200CBL1xxx). | I/O Interposing Relay Base (replaceable relays), fused (8 amps, replaceable), 16 points. Field terminals are removable. The relays on these interposing terminals are intended to be controlled with standard 24 VDC 0.5A VersaMax output modules (IC200MDL740 and IC200MDL750 using IC200CHS003 base and connected by IC200CBL1xxx). Expansion base. |
| Field Termination Type | Non-Integrated | Non-Integrated | Non-Integrated |
| Connection Style | Box | Box | Box |
| Removable Terminals Connectors | No | Yes | Yes |
| Input Voltage | 24 VDC from MDL740 and MDL750 | 24 VDC from MDL740 and MDL750 | 24 VDC from MDL740 and MDL750 |
| Output Voltage | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Load Current per Point | 8.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC (Replaceable Fuse) | 8.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC (Replaceable Fuse) | 8.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC (Replaceable Fuse) |
| Protection | Replaceable Fuse | Replaceable Fuse | Replaceable Fuse |
| Points per Common | Isolated Per Point | Isolated Per Point | Isolated Per Point |
| Dimensions (W x H x D) | 253.7 mm (9.9 in) x 126 mm (4.95 in) x 73 mm (2.8 in), not including the height of the DIN Rail | 253.7 mm (9.9 in) x 126 mm (4.95 in) x 73 mm (2.8 in), not including the height of the DIN Rail | 253.7 mm (9.9 in) x 126 mm (4.95 in) x 73 mm (2.8 in), not including the height of the DIN Rail |
| Cables | N/A | Requires a IC200CBL1xxx cable | N/A |



Power Supplies

VersaMax Power Supply modules snap onto any VersaMax CPU or Network Interface Unit or onto a power supply booster carrier. Each power supply can be used as the main power source for modules in the I/O station, or as a source of supplemental power for larger I/O applications.

| | IC200PWR001 | IC200PWR002 | IC200PWR101 | IC200PWR102 |
|-------------------------------|--|--|--|--|
| Product Name | 24 VDC Power Supply | 24 VDC Power Supply with Expanded 3.3 V | 120/240 VAC Power Supply | 120/240 VAC Power Supply with Expanded 3.3 VDC |
| Input Voltage | 24 VDC | 24 VDC | 120/240 VAC | 120/240 VAC |
| Output Voltage | 5 VDC, 3.3 VDC | 5 VDC, 3.3 VDC | 5 VDC, 3.3 VDC | 5 VDC, 3.3 VDC |
| Extended Power | No | Yes | No | Yes |
| Input Power | 11 W | 11 W | 27 VA | 27 VA |
| Holdup Time | 10 ms | 10 ms | 20 ms | 20 ms |
| Inrush Current | 20 A @ 24 VDC; 25 A @ 30 VDC | 20 A @ 24 VDC; 25 A @ 30 VDC | N/A | N/A |
| Protection | Short circuit, overload, reverse polarity | Short circuit, overload, reverse polarity | Short circuit, overload | Short circuit, overload |
| Total Output Current | 1.5 A maximum | 1.5 A maximum | 1.5 A maximum | 1.5 A maximum |
| 3.3V Output Current | 0.25 A maximum | 1.0 A maximum | 0.25 A maximum | 1.0 A maximum |
| 5V Output Current | 1.5 A minus the 3.3V current used, maximum | 1.5 A minus the 3.3V current used, maximum | 1.5 A minus the 3.3V current used, maximum | 1.5 A minus the 3.3V current used, maximum |
| Dimensions (W x H x D) | 49 mm (1.93 in) x 133.4 mm (5.25 in) x 39 mm (1.54 in), not including the height of the carrier or the DIN Rail | 49 mm (1.93 in) x 133.4 mm (5.25 in) x 39 mm (1.54 in), not including the height of the carrier or the DIN Rail | 49 mm (1.93 in) x 133.4 mm (5.25 in) x 39 mm (1.54 in), not including the height of the carrier or the DIN Rail | 49 mm (1.93 in) x 133.4 mm (5.25 in) x 39 mm (1.54 in), not including the height of the carrier or the DIN Rail |



Power Supplies

VersaMax Power Supply modules snap onto any VersaMax CPU or Network Interface Unit or onto a power supply booster carrier. Each power supply can be used as the main power source for modules in the I/O station, or as a source of supplemental power for larger I/O applications.

| | IC200PWR201 | IC200PWR202 | IC200PWB001 |
|-------------------------------|---|---|---|
| Product Name | 12 VDC Power Supply | 12 VDC Power Supply with Expanded 3.3 VDC | VersaMax Power Supply Booster Carrier. Supplies power to all modules to the right of booster. Requires power supply. |
| Input Voltage | 9.6-15 VDC, 12 VDC nominal | 9.6-15 VDC, 12 VDC nominal | N/A |
| Output Voltage | 5 VDC, 3.3 VDC | 5 VDC, 3.3 VDC | N/A |
| Extended Power | No | Yes | N/A |
| Input Power | 11 W | 11 W | N/A |
| Holdup Time | 10 ms | 10 ms | N/A |
| Inrush Current | 25 A at 12 VDC; 30 A at 15 VDC | 25 A at 12 VDC; 30 A at 15 VDC | N/A |
| Protection | Short circuit, overload, reverse polarity | Short circuit, overload, reverse polarity | N/A |
| Total Output Current | 1.5 A maximum | 1.5 A maximum | N/A |
| 3.3 V Output Current | 0.25 A maximum | 1.0 A maximum | N/A |
| 5V Output Current | 1.5 A minus the 3.3 V current used, maximum | 1.5 A minus the 3.3 V current used, maximum | N/A |
| Dimensions (W x H x D) | 49 mm (1.93 in) x 133.4 mm (5.25 in) x 39 mm (1.54 in), not including the height of the carrier or the DIN Rail | 49 mm (1.93 in) x 133.4 mm (5.25 in) x 39 mm (1.54 in), not including the height of the carrier or the DIN Rail | 66.8 mm (2.63 in) x 133.4 mm (5.25 in) x 70 mm (2.75 in), not including the height of DIN Rail |

Discrete Mixed I/O Modules



Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Discrete input modules receive signals from input devices such as sensors, push-buttons, and switches that can have two states: on or off, open or closed. Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Modules require a carrier base (IC200CHSxxx).

| | IC200MDD840 | IC200MDD842 | IC200MDD843 |
|---|--|--|---|
| Product Name | VersaMax Discrete Mixed Modules, 24 VDC Pos Logic Input 20 points/Output Relay 2.0 A, 12 points | VersaMax Discrete Mixed Modules 24 VDC Pos Logic Input 16/Output 24 VDC 0.5 A with ESCP | VersaMax Discrete Mixed Modules 24 VDC Positive Logic Input 10/Output Relay 6 |
| Input Voltage | 24 VDC | 24 VDC | 24 VDC |
| Output Voltage | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 24 VDC | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Number of Points | 20 in/12 out | 16 in/16 out | 10 in/6 out |
| Channel to Channel Isolation | No | No | No |
| Load Current per Point | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC | 0.5 A for 30 VDC | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC |
| Input and Output Response Time- On/Off(ms) | 0.5 and 10 | 0.5 and 0.5 | 0.5 and 10 |
| Protection | No internal fuses or snubbers | Short circuit protection, overcurrent protection, free-wheeling diodes | No internal fuses or snubbers |
| On State Current | 2.0-5.5 mA | 2.0-5.5 mA | 2.0-5.5 mA |
| Off State Current | 0-0.5 mA | 0-0.5 mA | 0-0.5 mA |
| External Power Supply | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 18-30 VDC, 24 VDC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Input Impedance | 10 kOhms maximum | 10 kOhms maximum | 10 kOhms maximum |
| Load Current | 2.0 A for 5-265 VAC or 5-30 VDC, 0.2 A for 31-125 VDC | 0.5 Amp at 30 VDC maximum (resistive); 2.0 Amps maximum for 100ms inrush | 10mA per point minimum, 8.0A maximum per module; 2.0 Amps for 5 to 265 VAC maximum (resistive); 2.0 Amps for 5 to 30 VDC maximum (resistive); 0.2 Amp for 31 to 125 VDC maximum (resistive) |
| 5V Backplane Current Consumption (mA) | 375 maximum | 100 maximum | 190 maximum |
| LED Indicators | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Mixed I/O Modules



Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Discrete input modules receive signals from input devices such as sensors, push-buttons, and switches that can have two states: on or off, open or closed. Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Modules require a carrier base (IC200CHSxxx).

| | IC200MDD844 | IC200MDD845 | IC200MDD846 |
|---|--|---|---|
| Product Name | VersaMax Discrete Mixed Modules 24 VDC Positive Logic Input 16/Output 24 VDC 0.5 A 16 points | VersaMax Discrete Mixed Modules 24 VDC Positive Logic Input 16/Output Relay 2.0A Isolated 8 points | VersaMax Discrete Mixed Modules 120 VAC Input 8 points/Outpoints Relay 2.0A Isolated 8 points |
| Input Voltage | 24 VDC | 24 VDC | 120 VAC |
| Output Voltage | 24 VDC | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Number of Points | 16 in/16 out | 16 in/8 out | 8 in/8 out |
| Channel to Channel Isolation | No | Yes, outputs | Yes, outputs |
| Load Current per Point | 0.5 A for 30 VDC | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC |
| Input and Output Response Time- On/Off(ms) | 0.5 and 0.2 ON / 1.0 OFF | 0.5 and 10 | 1 AC cycle minimum and 2 AC cycle (Hz dependent) maximum and 10.0 OFF |
| Protection | No internal fuses | No internal fuses or snubbers | No internal fuses or snubbers |
| On State Current | 2.0-5.5 mA | 2.0-5.5 mA | 5 mA minimum |
| Off State Current | 0-0.5 mA | 0-0.5 mA | 2.5 mA maximum |
| External Power Supply | 18-30 VDC, 24 VDC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Input Impedance | 10 kOhms maximum | 10 kOhms maximum | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical |
| Load Current | 0.5 Amp at 30 VDC maximum (resistive) 2.0 Amps maximum for 100ms inrush | 10mA per point minimum 2.0A for 5 to 265 VAC maximum (resistive) 2.0A for 5 to 30 VDC maximum (resistive) 0.2A for 31 to 125 VDC maximum (resistive) | 10mA per point minimum 2.0A for 5 to 265 VAC maximum (resistive) 2.0A for 5 to 30 VDC maximum (resistive) 0.2A for 31 to 125 VDC maximum (resistive) |
| 5V Backplane Current Consumption (mA) | 70 maximum | 270 maximum | 300 maximum |
| LED Indicators | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Mixed I/O Modules



Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Discrete input modules receive signals from input devices such as sensors, push-buttons, and switches that can have two states: on or off, open or closed. Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Modules require a carrier base (IC200CHSxxx).

| | IC200MDD847 | IC200MDD848 | IC200MDD849 |
|---|--|--|---|
| Product Name | VersaMax Discrete Mixed Modules 240 VAC Input 8 points/Output Relay 2.0A Isolated 8 points | VersaMax Discrete Mixed Modules 120 VAC Input 8 points/Output 120 VAC 0.5A Isolated 8 points | VersaMax Discrete Mixed Modules 120 VAC Input Isolated 8 points/Output Relay 2.0 A Isolated 8 points |
| Input Voltage | 240 VAC | 120 VAC | 0-132 VAC (47 to 63 Hz), 120 VAC nominal |
| Output Voltage | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 120 VAC | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Number of Points | 8 in/8 out | 8 in/8 out | 8 in/8 out |
| Channel to Channel Isolation | Yes, outputs | Yes | Yes |
| Load Current per Point | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC | 10 mA min, 0.5 A max, 5 A for 1 cycle (20 ms) max inrush | 2.0 A |
| Input and Output Response Time- On/Off(ms) | 1 AC cycle minimum and 2 AC cycle (Hz dependent) maximum and 10.0 OFF | 1 cycle/2 cycle and <1/2 cycle/<1/2 cycle | 1 cycle/2 cycle and 10/10 |
| Protection | No internal fuses or snubbers | Snubber and MOVs (each output) | No internal fuses or snubbers |
| On State Current | 4 mA minimum | 5 mA minimum | 5 mA minimum |
| Off State Current | 1.5 mA maximum | 2.5 mA maximum | 2.5 mA maximum |
| External Power Supply | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | N/A |
| Input Impedance | 38.5 kOhms (reactive) at 60 Hz, typical; 46.3 kOhms (reactive) at 50 Hz, typical | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical |
| Load Current | 10mA per point minimum 2.0 Amps for 5 to 265 VAC maximum (resistive) 2.0 Amps for 5 to 30 VDC maximum (resistive) 0.2 Amp for 31 to 125 VDC maximum (resistive) | 10 mA minimum per point, 0.5 A maximum per point, 5.0 A for one cycle (20 ms) maximum inrush | 10 mA per point minimum; 2.0 A for 5-265 VAC maximum (resistive); 2.0 A for 5-30 VDC maximum (resistive); 0.2 A for 31-125 VDC maximum (resistive) |
| 5V Backplane Current Consumption (mA) | 300 maximum | 125 maximum | 300 maximum |
| LED Indicators | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of (the carrier or the mating connectors) |

Discrete Mixed I/O Modules



Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Discrete input modules receive signals from input devices such as sensors, push-buttons, and switches that can have two states: on or off, open or closed. Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Modules require a carrier base (IC200CHSxxx).

| | IC200MDD850 | IC200MDD851 |
|---|--|---|
| Product Name | VersaMax Discrete Mixed Modules 240 VAC Input Isolated 4 points/Output Relay 2.0 A Isolated 8 points | VersaMax Discrete Mixed Modules 5/12 VDC Input 16 points/Output 12/24 VDC 16 points |
| Input Voltage | 0-264 VAC (47-63 Hz), 240 VAC nominal | 0 to 15 VDC, +5/12 VDC nominal |
| Output Voltage | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | +10.2 to +30 VDC, +12/24 VDC nominal |
| Number of Points | 8 out/4 in | 16 out/16 in |
| Channel to Channel Isolation | Yes | No |
| Load Current per Point | 2.0 A | 0.5 Amps at 30 VDC maximum (resistive) 2.0 Amps maximum for 100ms inrush |
| Input and Output Response Time- On/Off(ms) | 1 cycle/2 cycle and 10/10 | 0.25ms maximum/0.2ms ON and 1.0ms OFF maximum |
| Protection | No internal fuses or snubbers | No internal fuses or snubbers |
| On State Current | 4 mA minimum | 1.45mA minimum |
| Off State Current | 1.5 mA maximum | 0 to 0.7 mA maximum |
| External Power Supply | N/A | +10.2 to +30 VDC, +12/24 VDC nominal |
| Input Impedance | 38.5 kOhms (reactive) at 60 Hz, typical; 46.3 kOhms (reactive) at 50 Hz, typical | 2.4kOhms typical @ 12 VDC |
| Load Current | 10 mA per point minimum; 2.0 A for 5-265 VAC maximum (resistive); 2.0 A for 5-30 VDC maximum (resistive); 0.2 A for 31-125 VDC maximum (resistive) | 0.5 Amps at 30 VDC maximum (resistive); 2.0 Amps maximum for 100ms inrush |
| 5V Backplane Current Consumption (mA) | 260 maximum | 115 maximum |
| LED Indicators | One LED per point shows individual point on/off state logic side); OK LED indicates backplane power is present | One LED per point shows individual point on/off state logic side); OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Input Modules



Discrete input modules receive signals from input devices such as sensors, pushbuttons, and switches that can have two states: on or off, open or closed. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL140 | IC200MDL141 | IC200MDL143 |
|--|--|--|--|
| Product Name | VersaMax Discrete Input Module 120 VAC, 8 points | VersaMax Discrete Input Module 240 VAC, 8 points | VersaMax Discrete Input Module 120 VAC Isolated, 8 points |
| Input Voltage | 0-132 VAC | 0-264 VAC | 0-132 VAC |
| Number of Points | 8 | 8 | 8 |
| Channel to Channel Isolation | No | No | Yes |
| Input and Output Response Time- On/Off (ms) | 1 cycle/2 cycles | 1 cycle/2 cycles | 1 cycle/2 cycles |
| Points per Common | 1 group of 8 | 1 group of 8 | 8 groups of 1 |
| On State Current | 5 mA minimum | 7 mA minimum | 5 mA minimum |
| Off State Current | 2.5 mA maximum | 1.5 mA maximum | 2.5 mA maximum |
| Input Impedance | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical | 38.5 kOhms (reactive) at 60 Hz, typical; 46.3 kOhms (reactive) at 50 Hz, typical | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical |
| 5V Backplane Current Consumption (mA) | 55 maximum | 55 maximum | 50 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Input Modules



Discrete input modules receive signals from input devices such as sensors, pushbuttons, and switches that can have two states: on or off, open or closed. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL144 | IC200MDL240 | IC200MDL241 |
|--|--|--|--|
| Product Name | VersaMax Discrete Input Module 240 VAC Isolated, 4 points | VersaMax Discrete Input Module, 120 VAC Positive Logic, 16 points | VersaMax Discrete Input Module, 240 VAC Positive Logic, 16 points |
| Input Voltage | 0-264 VAC | 0-132 VAC | 0-264 VAC |
| Number of Points | 4 | 16 | 16 |
| Channel to Channel Isolation | Yes | No | No |
| Input and Output Response Time- On/Off (ms) | 1 cycle/2 cycles | 1 cycle/2 cycles | 1 cycle/2 cycles |
| Points per Common | 4 groups of 1 | 2 groups of 8 | 2 groups of 8 |
| On State Current | 7 mA minimum | 5 mA minimum | 4 mA minimum |
| Off State Current | 3 mA maximum | 2.5 mA maximum | 1.5 mA maximum |
| Input Impedance | 38.5 kOhms (reactive) at 60 Hz, typical; 46.3 kOhms (reactive) at 50 Hz, typical | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical | 38.5 kOhms (reactive) at 60 Hz, typical; 46.3 kOhms (reactive) at 50 Hz, typical |
| 5V Backplane Current Consumption (mA) | 30 maximum | 110 maximum | 110 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Input Modules



Discrete input modules receive signals from input devices such as sensors, pushbuttons, and switches that can have two states: on or off, open or closed. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL243 | IC200MDL244 | IC200MDL631 |
|--|--|--|--|
| Product Name | VersaMax Discrete Input Module, 120 VAC Isolated, 16 points | VersaMax Discrete Input Module, 240 VAC Isolated, 8 points | VersaMax Discrete Input Module 125 VDC, Pos/Neg Logic, Isolated, 8 points |
| Input Voltage | 0-132 VAC | 0-264 VAC | 0-150 VDC, 125 VDC nominal |
| Number of Points | 16 | 8 | 8 isolated inputs |
| Channel to Channel Isolation | Yes | Yes | Yes |
| Input and Output Response Time- On/Off (ms) | 1 cycle/2 cycles | 1 cycle/2 cycles | 0.5 maximum |
| Points per Common | 16 groups of 1 | 8 groups of 1 | 8 groups of 1 |
| On State Current | 5 mA minimum | 7 mA minimum | 1.0 mA minimum |
| Off State Current | 2.5 mA maximum | 3 mA maximum | 0 to 0.1 mA maximum |
| Input Impedance | 8.6 kOhms (reactive) at 60 Hz, typical; 10.32 kOhms (reactive) at 50 Hz, typical | 38.5 kOhms (reactive) at 60 Hz, typical; 46.3 kOhms (reactive) at 50 Hz, typical | 74 K Ohm typical at 125 VDC |
| 5V Backplane Current Consumption (mA) | 100 maximum | 60 maximum | 40 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Input Modules



Discrete input modules receive signals from input devices such as sensors, pushbuttons, and switches that can have two states: on or off, open or closed. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL632 | IC200MDL635 | IC200MDL636 |
|--|--|--|--|
| Product Name | VersaMax Discrete Input Module 125 VDC, Pos/Neg Logic, Isolated, 16 points | VersaMax Discrete Input Module 48 VDC, Pos/Neg Logic (2 Groups of 8), 16 points | VersaMax Discrete Input Module 48 VDC, Pos/Neg Logic (4 Groups of 8), 32 points |
| Input Voltage | 0-150 VDC, 125 VDC nominal | 0-60 VDC, 48 VDC nominal | 0-60 VDC, 48 VDC nominal |
| Number of Points | 16 isolated inputs | 16 inputs (2 groups of 8) | 32 (4 groups of 8) |
| Channel to Channel Isolation | Yes | No | No |
| Input and Output Response Time- On/Off (ms) | 0.5 maximum | 0.5 maximum | 0.5 maximum |
| Points per Common | 16 groups of 1 | 2 groups of 8 | 4 groups of 8 |
| On State Current | 1.0 mA minimum | 1.0 mA minimum | 1.0 mA minimum |
| Off State Current | 0 to 0.1 mA maximum | 0 to 0.4 mA maximum | 0 to 0.4 mA maximum |
| Input Impedance | 74 K Ohm typical at 125 VDC | 28 K Ohm typical | 28 K Ohm typical |
| 5V Backplane Current Consumption (mA) | 80 maximum | 70 maximum | 140 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Input Modules



Discrete input modules receive signals from input devices such as sensors, pushbuttons, and switches that can have two states: on or off, open or closed. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL640 | IC200MDL643 | IC200MDL644 | IC200MDL650 |
|--|--|--|--|--|
| Product Name | VersaMax Discrete Input Module, 24 VDC Pos/Neg Logic, 16 points | VersaMax Discrete Input Module, 5/12 VDC (TTL) Pos/Neg Logic, 16 points | VersaMax Discrete Input Module, 5/12 VDC (TTL) Pos/Neg Logic, 32 points | VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points |
| Input Voltage | 0-30 VDC | 0-15 VDC | 0-15 VDC | 0-30 VDC |
| Number of Points | 16 | 16 | 32 | 32 |
| Channel to Channel Isolation | No | No | No | No |
| Input and Output Response Time- On/Off (ms) | 0.5 | 0.25 | 0.25 | 0.5 |
| Points per Common | 2 groups of 8 | 2 groups of 8 | 4 groups of 8 | 2 groups of 8 |
| On State Current | 2.0-5.5 mA | 1.45 mA minimum | 1.45 mA minimum | 2.0-5.5 mA |
| Off State Current | 0-0.5 mA | 0-0.7 mA maximum | 0-0.7 mA maximum | 0-0.5 mA |
| Input Impedance | 10 kOhms maximum | 2.4 kOhms at 12 VDC, typical | 2.4 kOhms at 12 VDC, typical | 10 kOhms maximum |
| 5V Backplane Current Consumption (mA) | 25 maximum | 70 maximum | 140 maximum | 50 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status. OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Output Modules



Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL329 | IC200MDL330 | IC200MDL331 |
|--|--|--|--|
| Product Name | VersaMax Discrete Output Module, 120 VAC, 0.5A per point Isolated, 8 points | VersaMax Discrete Output Module, 120 VAC 0.5A per point Isolated, 16 points | VersaMax Discrete Output Module, 120 VAC 2.0A per point Isolated, 8 points |
| Output Voltage | 85-132 VAC (47-63 Hz), 120 VAC nominal | 85-132 VAC (47-63 Hz), 120 VAC nominal | 85-132 VAC (47-63 Hz), 120 VAC nominal |
| Number of Points | 8 | 16 | 8 |
| Channel to Channel Isolation | Yes | Yes | Yes |
| Load Current per Point | 0.5 A per point | 0.5 A per point | 2.0 A per point |
| Input and Output Response Time- On/Off (ms) | <1/2 cycle/<1/2 cycle | <1/2 cycle/<1/2 cycle | <1/2 cycle/<1/2 cycle |
| Protection | Snubber and MOVs (each output) | Snubber and MOVs (each output) | Snubber and MOVs (each output) |
| Points per Common | 8 groups of 1 | Isolated points | Isolated points |
| External Power Supply | 85-132 VAC (47-63 Hz), 120 VAC nominal | 85-132 VAC (47-63 Hz), 120 VAC nominal | 85-132 VAC (47-63 Hz), 120 VAC nominal |
| Load Current | 10 mA minimum per point, 0.5 A maximum per point, 5.0 A for one cycle (20 ms) maximum inrush | 10 mA minimum per point, 0.5 A maximum per point, 5.0 A for one cycle (20 ms) maximum inrush | 10 mA minimum per point, 2.0 A maximum per point, 20 A for one cycle (20 ms) maximum inrush |
| 5V Backplane Current Consumption (mA) | 70 maximum | 140 maximum | 85 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF status (logic side). OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status (logic side). OK LED indicates backplane power is present | One LED per point shows individual point ON/OFF status (logic side). OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Output Modules



Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL730 | IC200MDL740 | IC200MDL741 |
|--|--|--|--|
| Product Name | VersaMax Discrete Output Module, 24 VDC Positive Logic 2.0A per point w/ESCP, 8 points | VersaMax Discrete Output Module, 24 VDC Positive Logic, 0.5A per point, 16 points | VersaMax Discrete Output Module, 24 VDC Positive Logic, 0.5A per point w/ESCP, 16 points |
| Output Voltage | 17.5-30 VDC, 24 VDC nominal | 10.2-30 VDC, 12/24 VDC nominal | 18-30 VDC, 24 VDC nominal |
| Number of Points | 8 | 16 | 16 |
| Channel to Channel Isolation | No | No | No |
| Load Current per Point | 2.0 A per point | 0.5 A per point | 0.5 A per point |
| Input and Output Response Time- On/Off (ms) | 0.5 | 0.2/1.0 | 0.5/0.5 |
| Protection | Short circuit protection, overcurrent protection (each output) | No internal fuses (each output) | Short circuit protection, overcurrent protection, free-wheeling diodes (each output) |
| Points per Common | 1 group of 8 | 1 group of 16 | 1 group of 16 |
| External Power Supply | 18-30 VDC, 24 VDC nominal | 10.2-30 VDC, 12/24 VDC nominal | 18-30 VDC, 24 VDC nominal |
| Load Current | 2.0 A at 30 VDC maximum (resistive) per point, 8.0 A max per module | 0.5 A at 30 VDC maximum (resistive); 2.0 A inrush maximum for 100 ms | 0.5 A at 30 VDC maximum (resistive); 2.0 A inrush maximum for 100 ms |
| 5V Backplane Current Consumption (mA) | 50 maximum | 45 maximum | 75 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Output Modules



Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL742 | IC200MDL743 | IC200MDL744 |
|--|--|--|--|
| Product Name | VersaMax Discrete Output Module, 24 VDC Positive Logic 0.5A with ESCP, 32 points | VersaMax Discrete Output Module, 5/12/24 VDC Negative Logic, 0.5 A per point (1 group of 16) 16 points | VersaMax Discrete Output Module, 5/12/24 VDC Negative Logic, 0.5 A per point (2 groups of 16) 32 points |
| Output Voltage | 18-30 VDC, 24 VDC nominal | 5/12/24 VDC | 5/12/24 VDC |
| Number of Points | 32 | 16 (1 group of 16) | 32 (2 groups of 16) |
| Channel to Channel Isolation | No | No | No |
| Load Current per Point | 0.5 A per point | 0.5 A per point | 0.5 A per point |
| Input and Output Response Time- On/Off (ms) | 0.5/0.5 | 0.2/1.0 | 0.2/1.0 |
| Protection | Short circuit protection, overcurrent protection, free-wheeling diodes (each output) | No internal fuse | No internal fuse |
| Points per Common | 2 groups of 16 | 1 group of 16 | 2 groups of 16 |
| External Power Supply | 18-30 VDC, 24 VDC nominal | 4.75 to 5.25 VDC, 5 VDC nominal for 5 VDC-TTL mode; 10.2 to 30 VDC, 12/24 VDC nominal for 12/24 VDC mode | 4.75 to 5.25 VDC, 5 VDC nominal for 5 VDC-TTL mode; 10.2 to 30 VDC, 12/24 VDC nominal for 12/24 VDC mode |
| Load Current | 0.5 A at 30 VDC maximum (resistive); 2.0 A inrush maximum for 100 ms | 25 mA maximum for 5 VDC-TTL mode, 0.5 A at 30 VDC maximum, 2.0 A inrush maximum for 100 ms for 12/24 VDC mode | 25 mA maximum for 5 VDC-TTL mode, 0.5 A at 30 VDC maximum, 2.0 A inrush maximum for 100 ms for 12/24 VDC mode |
| 5V Backplane Current Consumption (mA) | 150 maximum | 70 maximum | 140 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Discrete Output Modules



Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Modules require a carrier base (IC200CHSxxx).

| | IC200MDL750 | IC200MDL930 | IC200MDL940 |
|--|--|--|--|
| Product Name | VersaMax Discrete Output Module, 24 VDC Positive Logic, 0.5A per point, 32 points | VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 8 points | VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points |
| Output Voltage | 10.2-30 VDC, 12/24 VDC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Number of Points | 32 | 8 | 16 |
| Channel to Channel Isolation | No | Yes | Yes |
| Load Current per Point | 0.5 A per point | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC | 2.0 A for 5-265 VAC, 2.0 A for 5-30 VDC, 0.2 A for 31-125 VDC |
| Input and Output Response Time- On/Off (ms) | 0.2/1.0 | 10.0/10.0 | 10.0/10.0 |
| Protection | No internal fuses | No internal fuses or snubbers | No internal fuses or snubbers |
| Points per Common | 2 groups of 16 | Isolated points | Isolated points |
| External Power Supply | 10.2-30 VDC, 12/24 VDC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal | 0-125 VDC, 5/24/125 VDC nominal; 0-265 VAC (47-63 Hz), 120/240 VAC nominal |
| Load Current | 0.5 A at 30 VDC maximum (resistive); 2.0 A inrush maximum for 100 ms | 10 mA per point minimum; 2.0 A for 5-265 VAC maximum (resistive); 2.0 A for 5-30 VDC maximum (resistive); 0.2 A for 31-125 VDC maximum (resistive) | 10 mA per point minimum; 2.0 A for 5-265 VAC maximum (resistive); 2.0 A for 5-30 VDC maximum (resistive); 0.2 A for 31-125 VDC maximum (resistive) |
| 5V Backplane Current Consumption (mA) | 90 maximum | 245 maximum | 490 maximum |
| LED Indicators | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | One LED per point shows individual point ON/OFF state (logic side). FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Analog Input Modules



Analog input modules receive signals from current and voltage input devices. Modules require a carrier base (IC200CHSxxx).

| | IC200ALG230 | IC200ALG240 | IC200ALG260 | IC200ALG261 |
|--|--|--|--|--|
| Product Name | VersaMax Analog Input Module, 12 Bit Voltage/Current, 4 Channels | VersaMax Analog Input Module, 16 Bit Voltage/Current Isolated, 8 Channel | VersaMax Analog Input Module, 12 Bit Voltage/Current, 8 Channel | VersaMax Analog Input Module, 15 Bit Differential Voltage, 8 Channel |
| Input Range | ±10 VDC or 0-10 VDC | ±10 VDC, 4-20 mA | 4-20mA, ±10 VDC or 0-10 VDC | ±10 VDC |
| Number of Channels | 4 | 8 Channel to channel isolated | 8 | 8 |
| External Power Supply | None | Range: 19.5-30 VDC including ripple; Current consumption: 100 mA maximum plus load currents | None | None |
| Resolution | Bipolar mode: 2.5 mV = 8 counts, Unipolar mode: 2.5 mV = 8 counts | Current mode: 381 nA nominal Voltage mode: 381 µV nominal | Current mode: 4 µA = 8 counts, Bipolar mode: 2.5 mV = 8 counts, Unipolar mode: 2.5 mV = 8 counts | Bipolar mode: 0.3125 mV = 1 counts |
| Update Rate | 0.4 ms | Approximately 20 mS max. @ 50 Hz filter frequency Approximately 16.7 mS max. @ 60 Hz filter frequency | 0.4 ms | 7.5 ms |
| Accuracy at 25°C | ±0.3% typical of full scale, ±0.5% maximum of full scale | ±0.1% maximum of full scale | ±0.3% typical of full scale, ±0.5% maximum of full scale | ±0.3% typical of full scale, ±0.5% maximum of full scale |
| Input Impedance | Voltage mode: 126 kOhms maximum, Current mode: 200 Ohms maximum | N/A | Voltage mode: 126 kOhms maximum, Current mode: 200 Ohms maximum | Voltage mode: 100 kOhms maximum |
| Input Filter Response | 5.0 ms | N/A | 5.0 ms | N/A |
| 5V Backplane Current Consumption (mA) | 125 maximum | 15 maximum | 130 maximum | 200 maximum |
| 3.3V Backplane Current Consumption (mA) | N/A | 120 maximum | N/A | N/A |
| LED Indicators | INT PWR LED indicates internally-generated field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates the presence of both logic power and user power. OK LED indicates module status. | INT PWR LED indicates internally-generated field power is present. OK LED indicates backplane power is present. | INT PWR LED indicates internally-generated field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Analog Input Modules



Analog input modules receive signals from current and voltage input devices. Modules require a carrier base (IC200CHSxxx).

| | IC200ALG262 | IC200ALG263 | IC200ALG264 |
|--|---|---|---|
| Product Name | VersaMax Analog Input Module, 15 Bit Differential Current, 8 Channel | VersaMax Analog Input Module, 15 Bit Voltage, 15 Channel | VersaMax Analog Input Module, 15 Bit Current, 15 Channel |
| Input Range | 0 to 20mA or 4 to 20mA | ±10 VDC | 0 to 20mA or 4 to 20mA |
| Number of Channels | 8 | 15 | 15 |
| External Power Supply | None | None | None |
| Resolution | 4 to 20mA: 0.5micro Amp= 1 count; 0 to 20mA: 0.625micro Amp = 1 count | Bipolar mode: 0.3125 mV = 1 count | 4 to 20mA: 0.5micro Amp= 1 count; 0 to 20mA: 0.625micro Amp = 1 count |
| Update Rate | 7.5 ms | 7.5 ms | 7.5 ms |
| Accuracy at 25°C | ±0.3% typical of full scale, ±0.5% maximum of full scale | ±0.3% typical of full scale, ±0.5% maximum of full scale | ±0.3% typical of full scale, ±0.5% maximum of full scale |
| Input Impedance | Current mode: 100 kOhms maximum | Voltage mode: 100 kOhms maximum | Voltage mode: 100 kOhms maximum, Current mode: 200 Ohms maximum |
| Input Filter Response | N/A | N/A | 24 Hz ±20% |
| 5V Backplane Current Consumption (mA) | 200 maximum | 150 maximum | 100 maximum |
| 3.3V Backplane Current Consumption (mA) | N/A | N/A | N/A |
| LED Indicators | INT PWR LED indicates internally-generated field power is present. OK LED indicates backplane power is present. | INT PWR LED indicates internally-generated field power is present. OK LED indicates backplane power is present. | INT PWR LED indicates internally-generated field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in) , not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in) , not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in) , not including the height of the carrier or the mating connectors |

Analog Output Modules



Analog output modules provide voltage or current signals to analog output devices. Modules require a carrier base (IC200CHSxxx).

| | IC200ALG320 | IC200ALG321 | IC200ALG322 |
|--|--|--|--|
| Product Name | VersaMax Analog Output Module, 12 Bit Current, 4 Channel | VersaMax Analog Output Module, 12 Bit 0-10V Voltage, 4 Channel | VersaMax Analog Output Module, 12 Bit \pm 10V Voltage, 4 Channel |
| Output Range | 4-20 mA | 0-10 VDC | \pm 10 VDC |
| Number of Channels | 4 | 4 | 4 |
| External Power Supply | Range: 18-30 VDC including ripple; Current consumption: 160 mA maximum including load current | Range: 18-30 VDC including ripple; Current consumption: 125 mA maximum | Range: 18-30 VDC including ripple; Current consumption: 125 mA maximum |
| Resolution | 4 μ A = 8 counts | 2.5 mV = 8 counts | 5 mV = 16 counts |
| Update Rate | 0.3 ms maximum | 0.3 ms maximum | 0.3 ms maximum |
| Accuracy at 25°C | \pm 0.3% typical of full scale, \pm 0.5% maximum of full scale | \pm 0.3% typical of full scale, \pm 0.5% maximum of full scale | \pm 0.3% typical of full scale, \pm 0.5% maximum of full scale |
| 5V Backplane Current Consumption (mA) | 50 maximum | 50 maximum | 50 maximum |
| 3.3V Backplane Current Consumption (mA) | N/A | N/A | N/A |
| LED Indicators | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Analog Output Modules



Analog output modules provide voltage or current signals to analog output devices. Modules require a carrier base (IC200CHSxxx).

| | IC200ALG325 | IC200ALG326 | IC200ALG327 | IC200ALG328 | IC200ALG331 |
|--|--|--|--|--|--|
| Product Name | VersaMax Analog Output Module, 13 Bit ± 10 VDC or 0 to 10 VDC Voltage, 8 Channel | VersaMax Analog Output Module, 13 Bit Current, 8 Channel | VersaMax Analog Output Module, 13 Bit ± 10 VDC or 0 to 10 VDC Voltage, 12 Channel | VersaMax Analog Output Module, 13 Bit, 0 - 20 mA, 4-20 mA Current, 12 Channel | VersaMax Analog Output Module, 14 Bit Voltage/Current 1500 VAC Isolation, 4 Channel |
| Output Range | ± 10 VDC or 0 to 10 VDC | 4 to 20 mA | ± 10 VDC or 0 to 10 VDC | 4 to 20 mA (default) 0 to 20 mA (configured with jumper) | ± 10 VDC, 4-20 mA |
| Number of Channels | 8 | 8 | 12 | 12 single ended, one group | 4 |
| External Power Supply | Range: 18-30 VDC including ripple; Current consumption: 102 mA maximum | Range: 18-30 VDC including ripple; 2A inrush maximum, 100 mA maximum (no load), 185 mA maximum (all 8 outputs at full scale) | Range: 18-30 VDC including ripple; Current consumption: 112 mA maximum | Range: 18-30 VDC including ripple; Current consumption: 2A inrush maximum 100 mA maximum (no load) 270 mA maximum (all 12 outputs at full scale) | Range: 19.5-30 VDC including ripple; Current consumption: 100 mA maximum plus load currents |
| Resolution | 1.25 mV = 4 counts | 4-20 mA: 5 counts = 2.5 μ A (~12.7 bits) 0-20 mA: 4 counts = 2.5 μ A (13 bits) | 1.25 mV = 4 counts | 4-20 mA: 5 counts = 2.5 μ A (~12.7 bits) 0-20 mA: 4 counts = 2.5 μ A (13 bits) | Current mode: 381 nA nominal Voltage mode: 381 μ V nominal |
| Update Rate | 15.0 ms maximum | 15.0 ms maximum | 10.0 ms maximum | 15 ms maximum | 7 ms maximum |
| Accuracy at 25°C | $\pm 0.3\%$ typical of full scale, $\pm 0.5\%$ maximum of full scale | $\pm 0.3\%$ of full scale (typical), $\pm 0.5\%$ of full scale (max) $\pm 1\%$ of full scale (max) | $\pm 0.3\%$ typical of full scale, $\pm 0.5\%$ maximum of full scale | +/- 0.3% of full scale (typical), +/- 0.5% of full scale (max.) +/- 1% of full scale (max.) | $\pm 0.1\%$ maximum of full scale |
| 5V Backplane Current Consumption (mA) | 50 maximum | 50 maximum | 50 maximum | 50 maximum | 10 maximum |
| 3.3V Backplane Current Consumption (mA) | N/A | N/A | N/A | N/A | 115 maximum |
| LED Indicators | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates the presence of both logic power and user power. OK LED indicates module status. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Analog Mixed Modules



Analog mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Modules require a carrier base (IC200CHSxxx).

| | IC200ALG430 | IC200ALG431 | IC200ALG432 |
|-------------------------------|--|--|--|
| Product Name | VersaMax Analog Mixed Module, 12 Bit Input Current 4 Channel/Output Current 2 Channel | VersaMax Analog Mixed Module, 12 Bit 0-10V Input 4 Channel/Output 0-10V 2 Channel | VersaMax Analog Mixed Module, 12 Bit \pm 10V Input 4 Channel/Output \pm 10V 2 Channel |
| Input Range | 4-20 mA | 0-10 VDC | -10 to +10 VDC |
| Output Range | 4-20 mA | 0-10 VDC | -10 to +10 VDC |
| External Power Supply | Range: 18-30 VDC including ripple; Current consumption: 125 mA maximum | Range: 18-30 VDC including ripple; Current consumption: 125 mA maximum | Range: 18-30 VDC including ripple; Current consumption: 125 mA maximum |
| Resolution | 4 μ A = 8 counts | 2.5 mV = 8 counts | Input: 2.5 mV = 8 counts, Output: 5 mV = 16 counts |
| Update Rate | 0.3 ms maximum | 0.3 ms maximum | 0.3 ms maximum |
| Accuracy at 25°C | \pm 0.3% typical of full scale, \pm 0.5% maximum of full scale | \pm 0.3% typical of full scale, \pm 0.5% maximum of full scale | \pm 0.3% typical of full scale, \pm 0.5% maximum of full scale |
| Input Impedance | 200 Ohms maximum | 120 kOhms minimum | 125 kOhms minimum |
| Input Filter Response | 5.0 ms | 5.0 ms | 5.0 ms |
| LED Indicators | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. | FLD PWR LED indicates field power is present. OK LED indicates backplane power is present. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

RTD and Thermocouple Modules

Specialty modules are available for RTD and Thermocouple inputs. Modules require a carrier base (IC200CHSxxx).



| | IC200ALG620 | IC200ALG630 |
|---|--|--|
| Product Name | VersaMax Analog Input Module, 16 Bit RTD, 4 Channel | VersaMax Analog Input Module, 16 Bit Thermocouple, 7 Channel |
| Input Range | RTD types: 25, 100, and 1000 ohm platinum 10, 50, and 100 ohm copper 100 and 120 ohm nickel 604 ohms nickel/iron | Thermocouple types: J, K, T, S, R, none (used for mV inputs) |
| Number of Channels | 4 | 7 |
| Resolution | 15 bits plus sign | 15 bits plus sign |
| Update Rate | 60 Hz: approximately 210 milliseconds per channel 50 Hz: approximately 230 milliseconds per channel | 60 Hz: approximately 60 milliseconds per channel 50 Hz: approximately 70 milliseconds per channel |
| Accuracy at 25°C | on voltage measurement: $\pm 0.15\%$ on resistance measurement on temperature measurement: $\pm 0.15\%$ on RTD (temperature) measurement | on voltage measurement: $\pm 0.2\%$ on temperature measurement: $\pm 0.15\%$ |
| 5 V Backplane Current Consumption (mA) | 125 maximum | 125 maximum |
| 3.3 V Backplane Current Consumption (mA) | 125 maximum | 125 maximum |
| LED Indicators | OK LED: green indicates backplane power is present. Amber indicates module fault. | OK LED: green indicates backplane power is present. Amber indicates module fault. |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Specialty Modules



Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Discrete input modules receive signals from input devices such as sensors, pushbuttons, and switches that can have two states: on or off, open or closed. Discrete output modules send control signals to devices such as contactors, indicator lamps, and interposing relays that can also have two states. Discrete mixed modules provide maximum flexibility by combining inputs and outputs in a single, compact module. Modules require a carrier base (IC200CHSxxx).

IC200MDD841

| | |
|--|---|
| Product Name | VersaMax Discrete Mixed Modules 24VDC Pos Logic Input 20/Output 12/HSC, PWM or Pulse Train |
| Input Voltage | 24 VDC |
| Output Voltage | 24 VDC |
| Number of Points | 20 in/12 out/4 configurable |
| Channel to Channel Isolation | No |
| Inrush Current | 2.0 A maximum for 100 ms |
| Input and Output Response Time- On/Off (ms) | 7 and 0.5 |
| Protection | No internal fuses |
| On State Current | 3.0-8.0 mA |
| Off State Current | 0-0.5 mA |
| External Power Supply | 24 VDC nominal, 18-30 VDC |
| Input Impedance | 9.6 kOhms maximum |
| Load Current | 0.5 A maximum |
| 5V Backplane Current Consumption (mA) | 30 |
| LED Indicators | One LED per point shows individual point on/off state (logic side); OK LED indicates backplane power is present |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Expansion Modules



Expansion Modules can be used to extend a VersaMax PLC or I/O station to include up to seven additional groups of up to eight modules each, providing the architectural flexibility to accommodate larger applications.

| | IC200ERM001 | IC200ERM002 | IC200ETM001 |
|---|---|---|---|
| Product Name | Expansion Receiver Module, Isolated | Expansion Receiver Module, Non-Isolated | Bus Transmitter Expansion Module |
| Expansion Type | Receiver | Receiver | Transmitter |
| Distance | Up to 2460 feet | Up to 50 feet | N/A |
| 5 V Backplane Current Consumption (mA) | 430 | 70 | 44 |
| 3.3 V Backplane Current Consumption (mA) | 20 | 20 | N/A |
| LED Indicators | PWR LED indicates 5 VDC power status; EXP RX LED indicates status of the expansion bus; SCAN indicates whether CPU/NIU is scanning I/O in expansion racks | PWR LED indicates 5 VDC power status; EXP RX LED indicates expansion bus communications status; SCAN indicates whether CPU/NIU is scanning I/O in expansion racks | PWR LED indicates 5 VDC power status; EXP TX LED indicates expansion bus communication status |
| Dimensions (W x H x D) | 2.63 (66.8 mm) x 5.04 (128 mm) not including the height of power supply | 2.63 (66.8 mm) x 5.04 (128 mm) not including the height of power supply | 37 mm (1.45 in) x 5.04 (128 mm) |

Remote I/O Units



A Remote I/O Unit connects VersaMax I/O modules to a host PLC or computer via a variety of networks, which makes it easy to include VersaMax I/O in Genius, Profibus-DP, DeviceNet, or Ethernet installations. Together, the Remote I/O Unit and its modules form an I/O station capable of providing up to 256 points of I/O.

| | IC200DBI001 | IC200EBI001 |
|---|--|--|
| Product Name | Remote I/O DeviceNet Network Interface Unit (Slave) | Remote I/O Ethernet Network Interface Unit |
| Protocol Supported | DeviceNet Slave | EGD and Modbus TCP Server |
| Distance | 500Kbps 100m bus length and branches totaling < 39m 250Kbps 250m bus length and branches totaling < 78m 125Kbps 500m bus length and branches totaling < 156m | 100 Meters max drop length 10/100Mbaud |
| I/O Discrete Points | Includes both discrete and analog. Up to 128 bytes of inputs + 2-byte status word Up to 128 bytes of outputs + 2-byte control word. | 1024 bytes maximum both discrete and analog. %I: 2048 points %Q: 2048 points |
| I/O Analog Words | Includes both discrete and analog. Up to 128 bytes of inputs + 2-byte status word Up to 128 bytes of outputs + 2-byte control word. | 1024 bytes maximum both discrete and analog. %AI: 128 channels %AQ: 128 channels |
| I/O Data | Up to 128 bytes of inputs + 2-byte status word Up to 128 bytes of outputs + 2-byte control word. | 256 Bytes of input, output, Analog input and Analog output |
| Network Topology | Linear bus (trunkline/dropline); power and signal on the same network cable | Network dependent |
| Transmission Media | Shielded, dual twisted pair cable, terminated at both ends | Ethernet twisted pair |
| Connector | 5-pin open pluggable connector | RJ-45 |
| User Diagnostic Data | 2 bytes of status/control | 4 |
| Number of Modules | 8 per NIU/station | 8 per NIU/station |
| Redundancy | N/A | No |
| 5V Backplane Current Consumption (mA) | 160 | 175 |
| 3.3V Backplane Current Consumption (mA) | 10 | 425 |
| Dimensions (W x H x D) | 133.4 mm (5.25 in) x 85.9 mm (3.38 in) not including the height of power supply | 133.4 mm (5.25 in) x 85.9 mm (3.38 in) not including the height of power supply |

Remote I/O Units



A Remote I/O Unit connects VersaMax I/O modules to a host PLC or computer via a variety of networks, which makes it easy to include VersaMax I/O in Genius, Profibus-DP, DeviceNet, or Ethernet installations. Together, the Remote I/O Unit and its modules form an I/O station capable of providing up to 256 points of I/O.

| | IC200GBI001 | IC200PBI001 |
|---|---|---|
| Product Name | Genius Network Interface Unit | Remote I/O Profibus-DP Network Interface Unit (Slave) |
| Protocol Supported | Genius | Profibus DP |
| Distance | 1372 to 2286 meters - 38.4 Kbaud supports a maximum of 16 devices. 1067 to 1372 meters 76.8 Kbaud supports a maximum of 32 devices. 609 to 1067 meters - 153.6 Kbaud extended supports a maximum of 32 devices. Less than 609 meters 153.6 Kbaud standard or 153.6 Kbaud extended supports a maximum of 32 devices. | 9.6Kbits - 1,200 meters 19.2Kbits - 1,200 meters 93.75Kbits - 1,200 meters 187.5Kbits - 600 meters 500Kbits - 400 meters 1.5Mbits - 200 meters 3Mbits; 6Mbits; 12Mbits - 100 meters |
| I/O Discrete Points | 1024 Inputs and 1024 Outputs | 375 bytes maximum. Up to 244 bytes of inputs or 244 bytes of outputs |
| I/O Analog Words | 64 Analog In and 64 Analog Out | 375 bytes maximum. Up to 244 bytes of inputs or 244 bytes of outputs |
| I/O Data | 128 bytes in and 128 out per bus scan | 375 bytes maximum. Up to 244 bytes of inputs or 244 bytes of outputs. |
| Network Topology | Bus | Linear bus, terminated at both ends. Stubs are possible. |
| Transmission Media | Shielded, twisted pair, fiber optic (external option) | Shielded, twisted pair cable |
| Connector | Removable Connector | 9-pin D-sub connector |
| User Diagnostic Data | Yes | 2 bytes of status/control, 5 bytes of standard Profibus diagnostics |
| Number of Modules | 8 per NIU/station | 8 per NIU/station |
| Redundancy | Full media and hardware redundancy supported | N/A |
| 5V Backplane Current Consumption (mA) | 250 | 250 |
| 3.3V Backplane Current Consumption (mA) | 10 | 10 |
| Dimensions (W x H x D) | 133.4 mm (5.25 in) x 85.9 mm (3.38 in) not including the height of power supply | 133.4 mm (5.25 in) x 85.9 mm (3.38 in) not including the height of power supply |

Network Interface Modules



Network Interface Modules allow a VersaMax PLC to operate as a master or slave on a network. Modules currently available support DeviceNet master or slave communications and Profibus-DP slave communications. An AS-i master communications is also available.

| | IC200BEM002 | IC200BEM103 | IC200BEM104 | IC200CHS006 |
|-------------------------------|--|--|--|--|
| Product Name | PLC Network Communications Profibus-DP (Slave). Requires IC200CHS006 Communications Carrier. | PLC Network Communications DeviceNet (Master). Requires IC200CHS006 Communications Carrier. | PLC Network Communications AS-i (Master). Requires IC200CHS006 Communications Carrier. | VersaMax I/O , Local Communications Carrier (Supports IC200BEMxxx Modules) |
| Number of Stations | 32 without repeaters; up to 125 with repeaters | N/A | N/A | N/A |
| I/O Data | 384 Bytes maximum; up to 244 bytes of inputs or 244 bytes of outputs | Up to 128 bytes of inputs and 128 bytes of outputs | 4 input bits and 4 output bits per slave | N/A |
| Network Data Rate | 9.6 Kbaud to 12 Mbaud | 125 Kbaud, 250 Kbaud, 500 Kbaud | 166.6Kbits/second | N/A |
| Network Topology | Linear bus, terminated at both ends. Stubs are possible | Linear bus (trunkline/ dropline); power and signal on the same network cable | Tree Structure | N/A |
| Transmission Media | Shielded, twisted pair cable | Shielded, dual twisted pair cable | Rubber coated two wire cable | N/A |
| Connector | 9-pin D-sub connector | 5-pin open pluggable connector | Box Style | N/A |
| Number of Nodes | N/A | Supports up to 40 slave devices | Supports up to 31 slave devices | N/A |
| User Diagnostic Data | N/A | One presence bit per slave device | Display data | N/A |
| Power Consumption | 460 mA maximum from 5 V output, 5 mA from +3.3 V output | 490 mA maximum from 5 V output, 2 mA from +3.3 V output | 350 mA maximum from 5 V output | N/A |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors | 66.8 mm (2.63 in) x 133.4 mm (5.25 in) x 70 mm (2.75 in), not including the height of DIN Rail |

Serial Communications



The serial communications expansion module provides a Modbus Master port for a Genius NIU remote I/O drop. The serial port can be used to interface with a wide range of Modbus slave devices such as controllers, VFDs, bar code readers, marques and much more. The data is transferred to and from the NIU over the Genius LAN and is compatible with any controller that supports Genius Global Data.

IC200CMM020

| | |
|--|---|
| Product Name | Serial Communications Expansion Module |
| Module Type | Modbus Master |
| NIU Type Supported | Genius |
| Number of Serial Communications Modules | Up to 2 per Genius NIU I/O Station |
| Number of RTU slaves per Serial Communications Module | 1 to 247 |
| Serial Port Type | RS-485. 15-pin subminiature 'D' connector. For RS-232 communications, an RS-485 to RS-232 adapter such as IC690ACC901 can be used. Adapter IC690ACC901 can be installed with its right-angle cable hanging down. RS-485 supports both 2-wire and 4-wire electrical interfaces |
| Baud Rate Supported | 1200, 2400, 4800, 9600, and 19200, and half or full duplex operation |
| COMMREQ command memory (%AQ) required in the GENERIC_COMM module hardware configuration | Depends on individual COMMREQ content. Minimum: 22 words Maximum: 64 words |
| RTU Master Commands | 65520, Initialize RTU Master Port 8000, Clear RTU Master Diag. Status 8001, Read RTU Master Diag. Status 8002, Send RTU Read/Force/Preset Query 8003, Send RTU Diagnostic Query |
| Power Consumption | 460 mA maximum from 5 V output, 5 mA from +3.3 V output |
| Dimensions (W x H x D) | 110 mm (4.3 in) x 66.8 mm (2.63 in) x 50 mm (1.956 in), not including the height of the carrier or the mating connectors |

Accessories

| | |
|-------------|--|
| IC200ACC001 | Replacement Battery for VersaMax CPUs |
| IC200ACC003 | EZ Program Store, CPU RS-485 Port Update Device |
| IC200ACC201 | Expansion Terminator QTY 1 |
| IC200ACC202 | Expansion Terminator QTY 2 |
| IC690ACC905 | Encapsulated Thermistor Kit QTY 2 |
| IC200ACC301 | I/O Filler Module |
| IC200ACC302 | I/O Input Simulator |
| IC200ACC303 | I/O Shorting Bar QTY 2 |
| IC200ACC304 | Cable Connector Kit, QTY 2, for connector base (IC200CHS003) I/O Base (IC200CHS011, CHS012, CHS014, CHS015 and CHS1xx bases) |
| IC200ACC313 | DIN rail clips (Qty 2) to secure modules on DIN rail |
| IC200TBM001 | I/O Auxiliary Terminal Strip, 18 Internally Bussed, Barrier Style |
| IC200TBM002 | I/O Auxiliary Terminal Strip, 18 Internally Bussed, Box Style |
| IC200TBM005 | I/O Auxiliary Terminal Strip, 18 Internally Bussed, Spring Clamp Style |

Cables for Connector Type Carrier

| | |
|-------------|--|
| IC200CBL105 | Cable, I/O Non-Shielded, 2 Connectors. 0.5M used with IC200CHS003 and IC200CHS011, 012, 015. |
| IC200CBL110 | Cable, I/O Non-Shielded, 2 Connectors, 1.0M used with IC200CHS003 and IC200CHS011, 012, 015. |
| IC200CBL120 | Cable, I/O Non-Shielded, 2 Connectors, 2.0M used with IC200CHS003 and IC200CHS011, 012, 015. |
| IC200CBL230 | Cable, I/O Non-Shielded, 1 Connector, 3.0M used with IC200CHS003 and IC200CHS011, 012, 015. |

Cables to Connect Rack to Rack Expansion

| | |
|-------------|--|
| IC200CBL600 | Rack Expansion Cable, Shielded, Single Ended, 1M to One Expansion Receiver Module (IC200ERM00x) |
| IC200CBL601 | Rack Expansion Cable, Shielded, 2 Connectors, 1M. Supports Multidrop to Multiple Expansion Receiver Modules (IC200ERM00x) |
| IC200CBL602 | Rack Expansion Cable, Shielded, 2 Connectors, 2M. Supports Multidrop to Multiple Expansion Receiver Modules (IC200ERM00x) |
| IC200ACC304 | Cable Connector Kit, QTY 2, for connector base (IC200CHS003) I/O Base (IC200CHS011, CHS012, CHS014, CHS015 and CHS1xx bases) |

Starter Kits


| | | |
|-------------|-----------------------------|--|
| IC200PKG001 | PLC Starter Kit CPU001 | Contains CPU001, PWR101, MDD845, CHS002, ACC302, CBL001, GFK-1503, GFK-1504, 641VPS300 (Infolink included), coffee mug, and plastic carry case. Does not include 24 VDC power supply for inputs. |
| IC200PKG010 | PLC Starter Kit CPUE05 | Contains CPUE05, PWR101, MDD845, CHS002, ACC302, CBL001, GFK-1503, GFK-1504, Machine Edition (Infolink included), coffee mug, and plastic carry case. Does not include 24 VDC power supply for inputs. |
| IC200PKG101 | I/O Starter Kit GENIUS | Contains GBI001, PWR101, MDD845, CHS002, ACC302, CBL001, GFK-1535, GFK-1504, 690CDR002 (Infolink), coffee mug, and plastic carry case. Does not include 24 VDC power supply for inputs. |
| IC200PKG102 | I/O Starter Kit Profibus-DP | Contains PBI001, PWR101, MDD845, CHS002, ACC302, CBL001, GFK-1534, GFK-1504, 690CDR002 (Infolink), coffee mug, and plastic carry case. Does not include 24 VDC power supply for inputs. |
| IC200PKG103 | I/O Starter Kit DeviceNet | Contains DBI001, PWR101, MDD845, CHS002, ACC302, CBL001, GFK-1533, GFK-1504, 690CDR002 (Infolink), coffee mug, and plastic carry case. Does not include 24 VDC power supply for inputs. |
| IC200PKG104 | I/O Starter Kit Ethernet | Contains EBI001, PWR101, MDD845, CHS002, ACC302, CBL001, GFK-1534, GFK-1504, Machine Edition (Infolink), coffee mug, and plastic carry case. Does not include 24 VDC power supply for inputs. |

Configuration Guidelines

When configuring a VersaMax Modular the following guidelines should be considered:

1. All I/O modules require an I/O Carrier (IC200CHS001, 002, 003, 005, 022 or 025).
2. When an I/O Connector Carrier (IC200CHS003) is selected, a cable (IC200CBL6xx) and interposing remote base (IC200CHS011, 012, 014 or 015) are required.
3. When configuring a system, the power consumptions should be tracked to determine what power supply and how many power supplies may be required.
4. DIN rail clips should be used to secure the VersaMax modules (IC200ACC313).
5. A maximum of 8 carriers, any combination of I/O or communications, can be connected directly to either an NIU or CPU. (Power Supply Booster base is not counted as a carrier). CPUs and NIUs can be expanded beyond the 8 carriers using the Bus Transmitter Expansion (IC200ETM001) and up to 7 Expansion Receiver Modules (IC200ERM00x) for a total of 64 carrier modules.

For a multiple-rack expansion system, connect the cable from the expansion port on the Expansion Transmitter to the Expansion Receivers as shown below. If all the Expansion Receivers are the Isolated type (IC200ERM001), the maximum overall cable length is 750 meters. If the expansion bus includes any non-isolated Expansion Receivers (IC200ERM002), the maximum overall cable length is 15 meters.

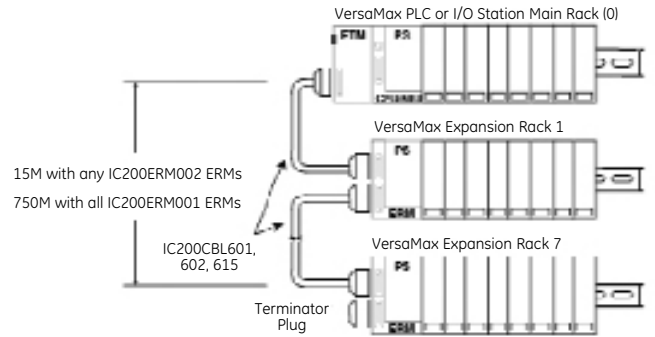

Install the Terminator Plug (supplied with the Expansion Transmitter module) into the lower port on the last Expansion Receiver. Spare Terminator Plugs can be purchased separately as part number IC200ACC201 (Qty 2).

Examples of Typical Application

Configuration for Controller (Example application requiring (30) 24 VDC inputs and (10) Relay outputs AC power supply)

| Power Supply Current Required (mA) | Qty | Part Number | Description |
|------------------------------------|--|---|---|
| 40 @ 5 V and 100 @ 3 V | 1 | IC200CPU001 | VersaMax PLC CPU 32K Configurable Memory, 2 Ports RS-232 and RS-485 |
| | 1 | IC200PWR101 | VersaMax 120/240 VAC Power Supply (1.5 amps 5 V and 0.25 amps 3.3 V) |
| 50 @ 5 V | 1 | IC200MDL650 | VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points |
| 490 @ 5 V | 1 | IC200MDL940 | VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points |
| | 2 | IC200CHS022 | VersaMax Compact I/O Carrier, Local Box Clamp Connection Style |
| | 1 | IC200ACC313 | DIN rail clips (Qty 2) to secure modules on DIN rail |
| | 1 | BC646MPS101 | Logic Developer - PLC Standard - w/Programming Cable |
| Total: | 580 @ 5 V and 100 @ 3 V (820 mA remaining). | 1500 mA available for 5 V and 3.3 V. | |

Options to consider

| | | | |
|-----------|---|-------------|---|
| | 1 | IC646MPH101 | Logic Developer PDA Single License with Adapters. With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup — saving you time and increasing productivity. |
| | 1 | IC690PWR024 | 24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply |
| 100 @ 5 V | 1 | IC200ACC003 | EZ Program Store, CPU RS485 Port Update Device |

Configuration for Controller (Application requiring 20K of Registers, (60) 24 VDC inputs, (15) AC Inputs, (12) AC Outputs and (20) Relay outputs also (16) Analog Inputs, (12) Isolated Analog Outputs and 24 VDC power supply. Also requires Profibus Slave connection)

| Power Supply Current Required | Qty | Part Number | Description |
|-------------------------------|---|---|--|
| 80 @ 5 V and 650 @ 3 V | 1 | IC200CPU005 | VersaMax PLC CPU 128K Configurable User Memory, 2 Ports RS-232 and RS-485 |
| | 3 | IC200PWR002 | 24 VDC Power Supply with Expanded 3.3 V (Logic side supply of 1.5 amps maximum. Up to 1.0 amp can be allocated for 3.3 V usage.) |
| 100 @ 5 V | 2 | IC200MDL650 | VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points |
| 110 @ 5 V | 1 | IC200MDL240 | VersaMax Discrete Input Module, 120 VAC Positive Logic, 16 points |
| 170 @ 5 V | 2 | IC200MDL331 | VersaMax Discrete Output Module, 120 VAC 2.0 A per point Isolated, 8 points |
| 980 @ 5 V | 2 | IC200MDL940 | VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points |
| 400 @ 5 V | 2 | IC200ALG262 | VersaMax Analog Input Module, 15 Bit Differential Current, 8 Channel |
| 10 @ 5 V and 115 @ 3 V | 2 | IC200ALG331 | VersaMax Analog Output Module, 14 Bit Voltage/Current 1500 VAC Isolation, 8 Channel |
| | 11 | IC200CHS022 | VersaMax Compact I/O Carrier, Local Box Clamp Connection Style |
| 460 @ 5 V and 5 @ 3 V | 1 | IC200BEM002 | PLC Network Communications Profibus-DP (Slave) |
| | 1 | IC200PWB001 | VersaMax Power Supply Booster Carrier. Supplies power to all modules to the right of booster. Requires power supply. |
| | 1 | IC200CHS006 | VersaMax I/O, Local Communications Carrier |
| 44 @ 5 V | 1 | IC200ETM001 | Bus Transmitter Expansion Module |
| 70 @ 5 V and 20 @ 3 V | 1 | IC200ERM002 | Expansion Receiver Module, Non-Isolated |
| | 1 | IC200CBL600 | Cable Expansion Shielded Single Ended 1M |
| | 1 | IC200ACC313 | DIN rail clips (Qty 2) to secure modules on DIN rail |
| | 1 | BC646MPS101 | Logic Developer - PLC Standard - w/Programming Cable |
| Total: | 2424 @ 5 V and 790 @ 3 V Required. | 4500 mA available for 5 V and 3.3 V. | Power Supply Booster required with extra Power Supply to meet power requirements. |

(continued on next page)

VersaMax

Options to consider

| | | | |
|-----------|---|---------------|--|
| | 1 | IC646MPH101 | Logic Developer PDA Single License with Adapters . With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup — saving you time and increasing productivity. |
| | 1 | IC690PWR024 | 24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply |
| | 1 | IC754VSI06STD | QuickPanel View Intermediate 6 inch STN Touch DC |
| 100 @ 5 V | 1 | IC200ACC003 | EZ Program Store, CPU RS485 Port Update Device |

Configuration for Controller Ethernet connectivity, (60) 24 VDC inputs, (20) Relay outputs, (16) Analog Inputs, (12) Thermocouples on a remote Ethernet drop, (12) Isolated Analog Outputs and 24 VDC power supply. Also requires Color TFT Operator Interface with Touch Screen.

| Power Supply Current Required | Qty | Part Number | Description |
|-------------------------------|---|---------------|--|
| 160 @ 5 V and 650 @ 3 V | 1 | IC200CPU05 | VersaMax PLC CPU 128K Configurable User Memory, 2 Ports RS-232 and RS-485, 10 MBIT Ethernet Port. Supports SRTP and EGD. |
| | 2 | IC200PWR002 | 24 VDC Power Supply with Expanded 3.3 V (Logic side supply of 1.5 amps maximum. Up to 1.0 amp can be allocated for 3.3 V usage.) |
| | 1 | IC200PWB001 | VersaMax Power Supply Booster Carrier. Supplies power to all modules to the right of booster. Requires power supply. |
| 100 @ 5 V | 2 | IC200MDL650 | VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points |
| 980 @ 5 V | 2 | IC200MDL940 | VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points |
| 400 @ 5 V | 2 | IC200ALG262 | VersaMax Analog Input Module, 15 Bit Differential Current, 8 Channel |
| 10 @ 5 V and 115 @ 3 V | 2 | IC200ALG331 | VersaMax Analog Output Module, 14 Bit Voltage/Current 1500 VAC Isolation, 8 Channel |
| | 8 | IC200CHS022 | VersaMax Compact I/O Carrier, Local Box Clamp Connection Style |
| | 2 | IC200ACC313 | DIN rail clips (Qty 2) to secure modules on DIN rail |
| | 1 | BC646MBT001 | Logic Developer PLC Standard Edition and View for QuickPanel with 15 mos. of Proficy GlobalCare which is renewable on an annual basis. |
| | 1 | IC754VSI06STD | QuickPanel View Intermediate 6 inch STN Touch DC |
| Total: | 1650 @ 5 V and 765 @ 3 V. 3000 mA available for 5 V and 3.3 V. | | |

Ethernet Remote Drop

| | | | |
|-------------------------|--|-------------|--|
| 175 @ 5 V and 425 @ 3 V | 1 | IC200ETM001 | Bus Transmitter Expansion Module |
| | 1 | IC200PWR002 | 24 VDC Power Supply with Expanded 3.3 V (Logic side supply of 1.5 amps maximum. Up to 1.0 amp can be allocated for 3.3 V usage.) |
| 250 @ 5 V and 250 @ 3 V | 2 | IC200ALG630 | VersaMax Analog Input Module, 16 Bit Thermocouple, 7 Channel |
| | 1 | IC690ACC905 | Encapsulated Thermistor Kit Qty 2 |
| | 2 | IC200CHS022 | VersaMax Compact I/O Carrier, Local Box Clamp Connection Style |
| | 1 | IC200ACC313 | DIN rail clips (Qty 2) to secure modules on DIN rail |
| Total: | 2424 @ 5 V and 790 @ 3 V Required. 4500 mA available for 5 V and 3.3 V. Power Supply Booster required with extra Power Supply to meet power requirements. | | |

Options to consider

| | | | |
|-----------|---|-------------|---|
| | 1 | IC646MPH101 | Logic Developer PDA Single License with Adapters. With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup — saving you time and increasing productivity. |
| | 1 | IC690PWR124 | 24 VDC, 10 Amp Output Power and 120/230 VAC Input Power Power Supply |
| 100 @ 5 V | 1 | IC200ACC003 | EZ Program Store, CPU RS485 Port Update Device |