

Residual Current Circuit Breakers




1, 2 and 4pole series up to 125AF



Type	RCBO					
	RKP	RKS	RKS-b	RKC	32KGRc	32KGRd
Protection	Ground fault and overcurrent	Ground fault and overcurrent		Ground fault and overcurrent	Ground fault and overcurrent	
Rated current	3 (C, D curve), 6, 10, 16, 20, 25, 32A (B, C, D curve)	6, 10, 16, 20, 25, 32A (40, 50A)* (B, C curve)		6, 10, 16, 20, 25, 32A (B, C curve)	15, 20, 30A	
Rated residual current	-	-		-	-	
Operating, $I_{\Delta n}$	30, 100, 300mA (Non-adjustable)	30, 100mA (Non-adjustable)		10, 30mA (Non-adjustable)	15, 30mA (Non-adjustable)	
Non-operating, $I_{\Delta no}$	$0.5I_{\Delta n}$	$0.5I_{\Delta n}$		$0.5I_{\Delta n}$	$0.5I_{\Delta n}$	
Poles	1P+N	1P+N		1P+N	2pole	
Rated voltage	230VAC	230VAC	240VAC	240VAC	110/240VAC	
Residual current off-time	≤ 0.1 sec.	≤ 0.3 sec.		≤ 0.1 sec.	≤ 0.03 sec.	
Standard	IEC 61009	IEC 61009		IEC 61009	IEC 61009, KS	
Approval	CCC, SEMKO CB, CE, SABS	SEMKO CB, CE, SABS	SEMKO CB, CE	BV CB	CCC	
Type of trip	-	-		-	-	
Ground fault	Electronic	Electronic		Electronic	Electronic	
Overcurrent	Thermal-magnetic	Thermal-magnetic		Thermal-magnetic	Bimetallic	
Breaking capacity	4.5kA	10kA		6kA (32A 4.5kA)	1.5kA	2.5kA
Conditional short circuit capacity	-	-		-	-	
Endurance Electrical	4,000 operations	4,000 operations		4,000 operations	4,000 operations	
Mechanical	10,000 operations	10,000 operations		10,000 operations	10,000 operations	
Mount	On 35mm DIN rail	On 35mm DIN rail		On 35mm DIN rail	On 35mm DIN rail / Screw	
Width	35.6mm	18mm		18mm	35mm	
Terminal	Lug type (Cable up to 10mm ²)	Lug type (Cable up to 10mm ²)		Lug type (Cable up to 10mm ²)	Screw clamp type (Cable up to 5.5mm ²)	
Type of operation	AC	AC		A/AC	-	
Dimension						
Characteristic curve	See page 45	See page 45		-	-	

* 40, 50A are available only for RKS-b

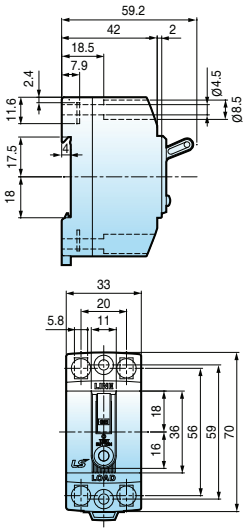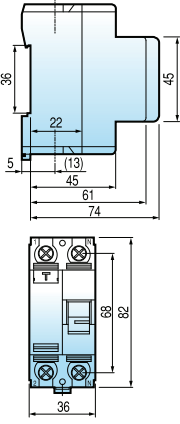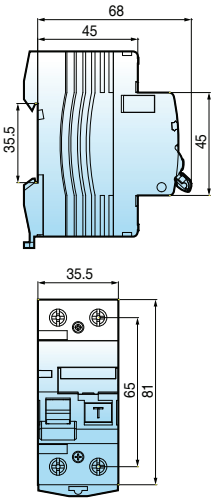

	RCCB				Isolator
	32GRhc	32GRhd	RKN	RKN-b	BKD
	Ground fault and overcurrent		Ground fault		-
	15, 20, 30A		25, 32, 40, 63A	63AF 25, 40, 63A	40, 50, 63, 80, 100, 125A
	-		-	-	-
	15, 30mA (Non-adjustable)		30, 100, 300mA (Non-adjustable)		-
	0.5I _{Δn}		0.5I _{Δn}		-
	2pole		1P+N, 3P+N		1p, 2p, 3p, 4p
	110/220VAC		240VAC (1P+N), 240/415V (3P+N)		230/400VAC
	≤0.03 sec		≤0.1 sec		-
	KS		IEC 61008		IEC 60947-3
	-		SEMKO CB, CE, NF, SABS, CCC	SEMKO CB, CE, SABS	SABS, SEMKO CB
	-		-	-	-
	Electronic		Electro-magnetic		-
	Bimetallic		N.A		-
	1.5kA	2.5kA	-		-
	-		6kA	10kA	-
	4,000 operations		4,000 operations		1,500 operations (125A 1,000 operations)
	10,000 operations		10,000 operations		10,000 operations
	On 35mm DIN rail / Screw		On 35mm DIN rail		On 35mm DIN rail
	33mm		-		17.8mm per pole
	Screw clamp type (Cable up to 5.5mm ²)		Lug type (Cable up to 35mm ²)		Lug type (Cable up to 50mm ²)
	-		A/AC	A/AC AC	-
					
	-		-	-	