




Miniature Circuit Breakers

1, 2, 3 and 4pole series up to 125AF [IEC 60898, IEC 60947-2]

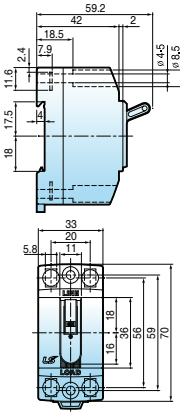

Type	MCB				
	BKN	BKN-c	BKN-b	BS32c	BS32d
Protection	Overload and short circuit		Overload and short circuit		Overload and short circuit
Rated current	1, 2, 3, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50, 63A		1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A		6, 10, 15, 20, 30A
Characteristic	B, C, D curve		B, C, D curve		-
Poles	1P, 1P+N, 2P, 3P, 3P+N, 4P		1P, 1P+N, 2P, 3P, 3P+N, 4P		-
Breaking capacity	1pole	2~4pole	1pole	2pole	
	1A ~ 63A 6kA at 230/400VAC (NF: 4.5kA)	1A ~ 63A 6kA at 400VAC	1A ~ 63A 10kA at 240/415VAC	1.5kA	2.5kA
Standard	IEC 60898		IEC 60898, IEC 60947-2		IEC 60898, KS
Approval	CCC, SABS, SEMKO CB		KEMA CB, SABS, CE, NF*		CCC
Type of trip	Thermal magnetic release		Thermal magnetic release		-
Endurance	4,000 operations		4,000 operations		4,000 operations
	10,000 operations		10,000 operations		10,000 operations
Mount	On 35mm DIN rail		On 35mm DIN rail		DIN rail / Screw
Width	17.8mm per pole		17.8mm per pole		33mm per pole
Terminal	Lug type (Cable up to 25mm ²)	Dual type (Lug & Screw)	Lug type (Cable up to 25mm ²)		Screw clamp type (Cable up to 5.5mm ²)
Auxiliary switch, AX & AL Optional	 1 changeover contact 6A at 240VAC, 3A at 415VAC (AX) 6A at 230VAC, 3A at 415VAC (AL) 2A at 48VDC, 1A at 125VDC Lug terminal Cable capacity 2.5mm² 9mm wide *Only for BKN		 1 changeover contact 6A at 240VAC, 3A at 415VAC (AX/ AL) 6A at 24VDC, 2A at 48VDC, 1A at 130VDC Lug terminal Cable capacity 0.75~2.5mm² 8.8mm wide		
Dimension					
Characteristic curve	See page 45		See page 45		-
Remarks	-		-		-

* NF : Breaking capacity 6kA



MCB						
BKH		BKP	BF-a	BF-c	BFN	
Overload and short circuit		Overload and short circuit	Overload and short circuit		Overload and short circuit	
63, 80, 100, 125A		3, 6, 10, 16, 20, 25, 32A	10~100A		5, 10, 15, 20, 30, 40, 50A	
C, D curve		B, C, D curve	-		-	
1P, 2P, 3P, 3P+N, 4P		1P+N	1p, 2p, 3p		1p, 2p, 3p	
1pole	2~4pole	-	-		1pole	2~3pole
63A ~ 125A 10kA at 230VAC	63A ~ 125A 10kA at 400VAC	3A ~ 32A 4.5kA at 230VAC (NF: 3kA)	10A~100A 10kA at 240VAC 2.5kA at 415VAC	10A~100A 5kA at 240VAC 2.5kA at 415VAC	5A~50A 10kA at 230VAC	5A~50A 10kA at 400VAC
IEC 60947-2		IEC 60898	IEC 60947-2		IEC 60947-2	
CCC, SEMKO CB, SABS, CE		CCC, SEMKO CB, NF, SABS, CE	-		SEMKO CB, CE	
Thermal magnetic release		Thermal magnetic release	Thermal magnetic release		Thermal magnetic release	
1,500 operations		4,000 operations	1,500 operations		1,500 operations	
10,000 operations		10,000 operations	10,000 operations		10,000 operations	
On 35mm DIN rail		On 35mm DIN rail	Holder mounting (Bolt on with fixing brackets)		Plug-in	
27mm per pole		17.8mm	25mm per pole		25mm per pole	
Lug type (Cable up to 50mm ²)		Lug type (Cable up to 10mm ²)	Clamp type		Lug type (14-6 AWG.)	
See page 45		See page 45	See page 46		See page 47	
IEC 60947-2 (SABS)		-	-		-	