


# 100 & 150 AMP - Cast Aluminum

## Receptacles, Plugs, Connectors, Motor Plugs

**NEMA 4 Watertight**  
**600 VAC / 250 VDC**  
**50 - 400 Hz**

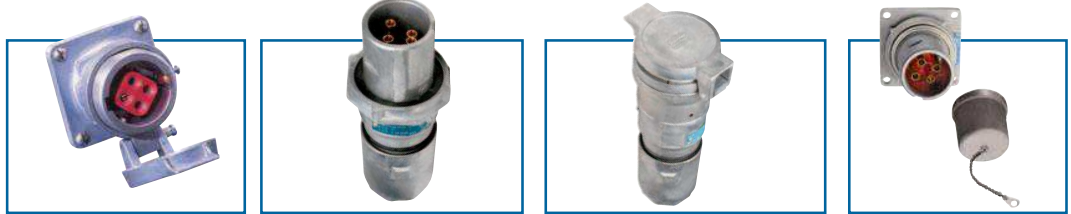

DESCRIPTION AND CONFIGURATION	RECEPTACLE* W/ SPRING DOOR CAT. NO.	PLUG		CORD CONNECTOR		MOTOR PLUG CAT. NO.
		CABLE RANGE	CAT. NO.	CABLE RANGE	CAT. NO.	
2 Wire 3 Pole Style 2	AR1032	0.875-1.7	APJ10387	0.875-1.7	APR10367	APQ1038
3 Wire 3 Pole Style 1	AR1031	0.875-1.7	APJ10377	0.875-1.7	APR10357	APQ1037
3 Wire 4 Pole Style 2	AR1042	0.875-1.7	APJ10487	0.875-1.7	APR10467	APQ1048
4 Wire 4 Pole Style 1	AR1041	0.875-1.7	APJ10477	0.875-1.7	APR10457	APQ1047

\*To order AR Receptacles complete with **screw cap** instead of spring door, change the last digit from 1 to 7 or 2 to 8; i.e., AR1031 to AR1037 **OR** AR1042 to AR1048 (see page 16 for screw caps).

- For optional reversed interior, use suffix “**S22**” (see page 3).
- For optional rotated interior, use suffix “**S4**” (see page 3).
- For dimensions, see page 15.
- Maximum conductor size (wire well) 0.390” (see page 17).

## Receptacles and Plugs - 150 Amp

DESCRIPTION AND CONFIGURATION	RECEPTACLE W/ SPRING DOOR CAT. NO.	PLUG	
		CABLE RANGE	CAT. NO.
3 Wire 4 Pole Style 2	AR1542	0.875-1.7	APJ15487

- **Uniquely polarized for 150A applications**
- **Consult factory for additional options and configurations.**

**Back Boxes (for Receptacles and Motor Plugs) - See page 11**