

MALLEABLE IRON THREADED CONDUIT BODIES

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

FEATURES

- Tapered threaded hubs (NPT)
- Flat back design for easy mounting close to walls
- Suitable for use in concrete

STANDARD MATERIALS

Malleable Iron

STANDARD FINISH

Zinc Plated




TYPE C1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
C TYPE										
C1	1/2"	5.375	1.313	1.375	N/A	4.50	10	50	98	43010
C2	3/4"	6.000	1.500	1.688	3 #6 AWG	7.50	10	50	118	43020
C3	1"	7.063	1.813	1.875	3 #4 AWG	12.50	5	25	170	43030
C4	1-1/4"	9.000	2.625	2.750	3 #2 AWG	32.30	—	10	309	43040
C5	1-1/2"	9.000	2.625	2.813	3 #1/0 AWG	35.30	—	10	368	43050
C6	2"	11.500	3.125	3.313	3 #4/0 AWG	73.00	—	5	553	43060
C7	2-1/2"	15.000	4.313	3.875	3 #250 MCM	138.00	—	1	1216	43070
C8	3"	15.125	4.313	4.750	3 #250 MCM	170.00	—	1	1437	43080
C9	3-1/2"	18.125	4.875	5.625	3 #350 MCM	300.00	—	1	2210	43090
C10	4"	18.125	4.875	5.625	3 #350 MCM	328.00	—	1	2321	43100

OPTIONAL FINISH

For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix 'G' to Malleable Iron catalog number. Example LB1G. For more information, see page 11.

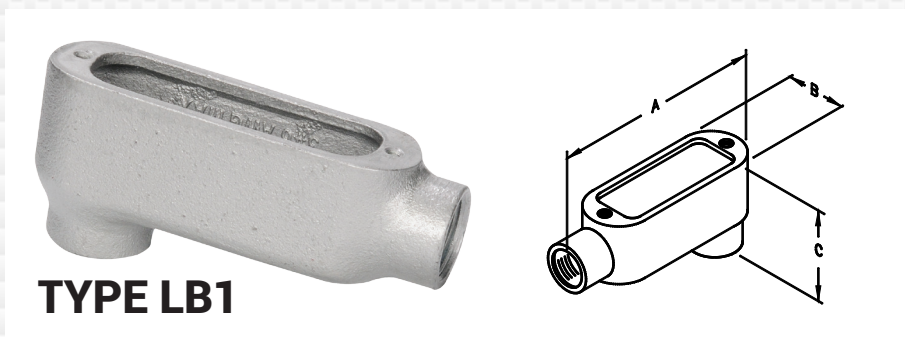

TYPE LB1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
LB TYPE										
LB1	1/2"	4.688	1.313	2.063	N/A	4.50	10	50	71	40011
LB2	3/4"	5.375	1.500	2.250	3 #6 AWG	7.50	10	50	97	40021
LB3	1"	6.188	1.813	2.625	3 #4 AWG	12.50	5	25	143	40031
LB4	1-1/4"	8.125	2.625	2.750	3 #2 AWG	32.30	—	10	287	40041
LB5	1-1/2"	8.125	2.625	2.813	3 #1/0 AWG	35.30	—	10	332	40051
LB6	2"	10.500	3.125	4.438	3 #4/0 AWG	73.00	—	5	534	40061
LB7	2-1/2"	13.625	4.313	5.375	3 #350 AWG	138.00	—	1	1105	40071
LB8	3"	13.875	4.313	5.875	3 #350 AWG	170.00	—	1	1160	40081
LB9	3-1/2"	16.250	5.625	6.875	3 #500 MCM	300.00	—	1	1989	40091
LB10	4"	16.625	5.625	7.188	3 #500 MCM	328.00	—	1	2100	40101